

Ceiling luminaires

DOT



LUMINAIRE


- Die-cast aluminium body (EN 47100).
- Double layer polyester powder paint resistant to corrosion and salt spray fog.
- Silicone rubber gaskets.
- AISI 316 stainless steel external screws.
- Opal PMMA screen.
- High quality LED sources characterized according to IES TM-30, with high color consistency <3SDCM and long useful life >60000 hours at L80.
- It complies with standards EN 60598-1 and EN 60598-2-1.

INSTALLATION

- Wall or ceiling installation.
- Grommet for single cable entry.
- Available double cable gland version for through wiring on request.

Available versions with Casambi and other modern control systems, for more information see "Light controls" section.

STANDARD PRODUCT		AVAILABLE OPTIONS	
Wiring	ON/OFF (A)	DALI (B)	
CCT	4000K (-840)	3000K (-830)	
Colour	○ 11	● 12, ● 16, ● 21	

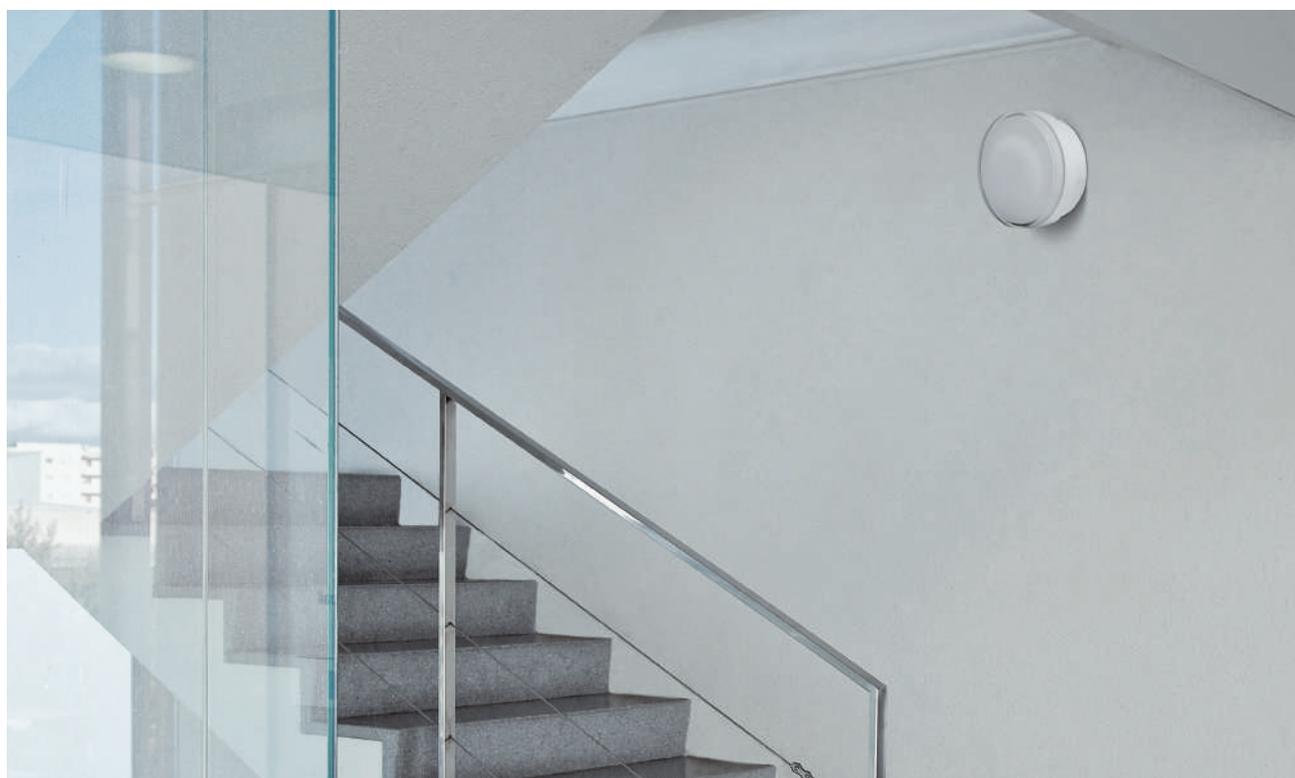

Photorealistic rendering.

Ceiling luminaires

DOT




STANDARD COLOUR

○ 11




DIMENSIONS



Code	Optic	Luminaire		CRI	CCT	Class	Wiring	Power Supply	A mm	B mm	C mm
		Watt	Lumen								
0277003A-840-11	 extra wide flood 130°	20W	1260lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	209	89	-

The **photo** represents the family product range. You can see the correct image of each product (code) on the website.

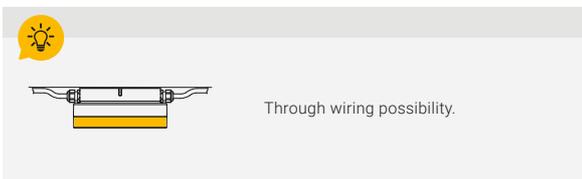

LED driver included.



Photorealistic rendering.