

Bollards

GOTHIC₁₁₀



LUMINAIRE



- Die-cast aluminium body (EN 47100).
- Extruded aluminium pole.
- Double layer polyester powder paint resistant to corrosion and salt spray fog.
- Silicone rubber gaskets.
- AISI 316 stainless steel external screws.
- Screen made of 5mm thermal-shock resistant tempered glass.
- High quality LED sources characterized according to IES TM-30, with high color consistency <3SDCM and long useful life >60000 hours at L80.
- It complies with standards EN 60598-1 and EN 60598-2-1.

INSTALLATION

- Bollard installation.
- Die-cast aluminium base (EN 47100) for ground anchoring for rawlplugs.
- Supplied with power cable.

These fittings are suitable for the modern control systems. For the various possibilities, please see section "Controlling the light".

Different accessories to be ordered separately.

STANDARD PRODUCT		AVAILABLE OPTIONS	
Wiring	ON/OFF (A)	DALI (B)	
CCT	4000K (-840)	3000K (-830)	
Colour	 16	 21	



Photorealistic rendering.

Bollards

GOTHIC₁₁₀


TOWOY




STANDARD COLOUR

 16


DIMENSIONS



Code	Optic	Luminaire		CRI	CCT	Class	Wiring	Power Supply	A mm	B mm	C mm
		Watt	Lumen								
0865004A-840-16	 two way	20W	325lm	80	4000K	☐	ON/OFF	220-240V 50/60Hz	110	800	-

 The **photo** represents the family product range. You can see the correct image of each product (code) on the website.


THREEWAY




STANDARD COLOUR

 16


DIMENSIONS



Code	Optic	Luminaire		CRI	CCT	Class	Wiring	Power Supply	A mm	B mm	C mm
		Watt	Lumen								
0865005A-840-16	 three way	20W	475lm	80	4000K	☐	ON/OFF	220-240V 50/60Hz	110	800	-

 The **photo** represents the family product range. You can see the correct image of each product (code) on the website.


RADIAL




STANDARD COLOUR

 16


DIMENSIONS




Code	Optic	Luminaire		CRI	CCT	Class	Wiring	Power Supply	A mm	B mm	C mm
		Watt	Lumen								
0865006A-840-16	 radial	20W	650lm	80	4000K	☐	ON/OFF	220-240V 50/60Hz	110	800	-

 The **photo** represents the family product range. You can see the correct image of each product (code) on the website.

LED driver included.


GOTHIC₁₁₀

ACCESSORIES

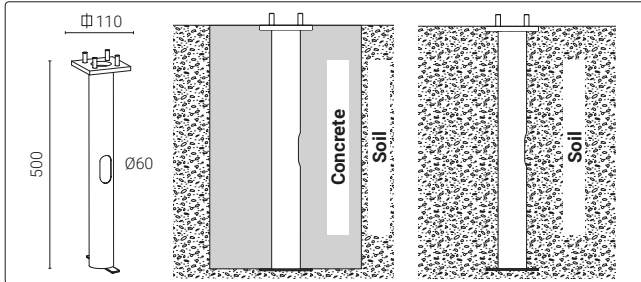

Code	Kg
1099091X	2,10

Zinc-coated steel pillar.




Code	Kg
1099401X-16	1,00

Galvanized and painted steel base plate with galvanized steel stud bolts.



Code	Kg
1099408X	0,03

IP68 linear joint -
2 ways - 2 poles.



Code	Kg
1099259X	0,05

Junction box IP68 -
4 ways - 2/3 poles



Photorealistic rendering.

Bollards

GOTHIC180



LUMINAIRE

- Die-cast aluminium body (EN 47100).
- Extruded aluminium pole.
- Double layer polyester powder paint resistant to corrosion and salt spray fog.
- Silicone rubber gaskets.
- AISI 316 stainless steel external screws.
- PMMA lenses for LEDs.
- Screen made of 5mm thermal-shock resistant tempered glass.
- High quality LED sources characterized according to IES TM-30, with high color consistency <3SDCM and long useful life >60000 hours at L80.
- It complies with standards EN 60598-1 and EN 60598-2-1.

INSTALLATION

- Bollard installation.
- Die-cast aluminium base (EN 47100) for ground anchoring for rawlplugs.
- Supplied with power cable.

These fittings are suitable for the modern control systems. For the various possibilities, please see section "Controlling the light".

Different accessories to be ordered separately.

STANDARD PRODUCT		AVAILABLE OPTIONS	
Wiring	ON/OFF (A)	DALI (B), REM-D (C)	
CCT	4000K (-840)	3000K (-830)	
Colour	<input checked="" type="radio"/> 16	<input type="radio"/> 21	



📍 Canada Water - London, United Kingdom


Bollards

GOTHIC₁₈₀


TOWAY





STANDARD COLOUR


 16


DIMENSIONS




Code	Optic	Luminaire		CRI	CCT	Class	Wiring	Power Supply	A mm	B mm	C mm
		Watt	Lumen								
0869014A-840-16	 two way	19W	850lm	80	4000K	☐	ON/OFF	220-240V 50/60Hz	180	710	-
0869013A-840-16	 two way	19W	850lm	80	4000K	☐	ON/OFF	220-240V 50/60Hz	180	1000	-

 The **photo** represents the family product range. You can see the correct image of each product (code) on the website.


THREEWAY





STANDARD COLOUR


 16


DIMENSIONS



Code	Optic	Luminaire		CRI	CCT	Class	Wiring	Power Supply	A mm	B mm	C mm
		Watt	Lumen								
0869016A-840-16	 three way	27W	1200lm	80	3000K	☐	ON/OFF	220-240V 50/60Hz	180	710	-
0869015A-840-16	 three way	28W	1200lm	80	4000K	☐	ON/OFF	220-240V 50/60Hz	180	1000	-

 The **photo** represents the family product range. You can see the correct image of each product (code) on the website.

 Canada Water - London, United Kingdom

LED driver included.
 **Available on request:** versions
with Smart Function


GOTHIC₁₈₀

RADIAL




STANDARD COLOUR

● 16




DIMENSIONS



Code	Optic	Luminaire		CRI	CCT	Class	Wiring	Power Supply	A mm	B mm	C mm
		Watt	Lumen								
0869018A-840-16	radial	36W	1750lm	80	4000K	□	ON/OFF	220-240V 50/60Hz	180	710	-
0869017A-840-16	radial	36W	1750lm	80	4000K	□	ON/OFF	220-240V 50/60Hz	180	1000	-
VERSION 24Vdc											
0869019C-840-16	radial	33W	1750lm	80	4000K	◇	REM-D		180	1000	-


The **photo** represents the family product range. You can see the correct image of each product (code) on the website.

ACCESSORIES

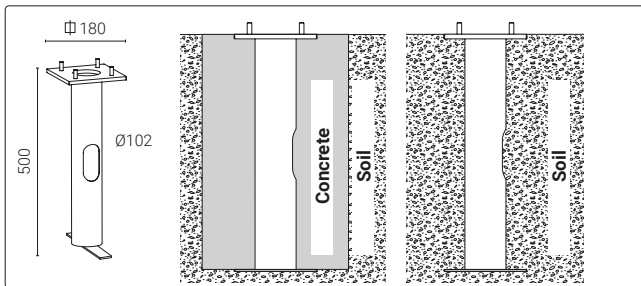

Code	Kg
1099093X	6,60

Zinc-plated anchorage.




Code	Kg
1099402X-16	1,40

Galvanized and painted steel base plate with galvanized steel stud bolts.



Code	Kg
1099408X	0,03

IP68 linear joint - 2 ways - 2 poles.



Code	Kg
1099259X	0,05

Junction box IP68 - 4 ways - 2/3 poles



Code	Kg
1099407X	0,03

Junction box IP68 - 4 ways - 4/5 poles.



Code	Kg
1099410X	0,03

IP68 linear joint - 2 ways - 4 poles.

LED driver included.

 **Available on request:** versions with Smart Function