

Ceiling luminaires

INTIS



Ceiling luminaires


INTIS

CEILING






STANDARD COLOUR

● 21




DIMENSIONS



Code	Optic	Luminaire		CRI	CCT	Class	Wiring	Power Supply	A mm	B mm	C mm
		Watt	Lumen								
0258017A-840-21	 narrow 11°	20W	2100lm	80	4000K	⊖	ON/OFF	220-240V 50/60Hz	211	220	-
0258013A-840-21	 narrow 11°	27W	2900lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	211	220	-
0258015A-840-21	 narrow 11°	35W	3500lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	211	220	-
0258031A-840-21	 medium 16°	76W	8100lm	80	4000K	⊖	ON/OFF	220-240V 50/60Hz	211	220	-
0258018A-840-21	 flood 38°	20W	1950lm	80	4000K	⊖	ON/OFF	220-240V 50/60Hz	211	220	-
0258008A-840-21	 flood 38°	27W	2600lm	80	4000K	⊖	ON/OFF	220-240V 50/60Hz	211	220	-
0258012A-840-21	 flood 38°	35W	3150lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	211	220	-
0258032A-840-21	 flood 40°	76W	7200lm	80	4000K	⊖	ON/OFF	220-240V 50/60Hz	211	220	-
0258019A-840-21	 very-wide flood 65°	20W	1850lm	80	4000K	⊖	ON/OFF	220-240V 50/60Hz	211	220	-
0258016A-840-21	 very-wide flood 65°	27W	2300lm	80	4000K	⊖	ON/OFF	220-240V 50/60Hz	211	220	-
0258014A-840-21	 very-wide flood 65°	35W	2850lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	211	220	-
0258033A-840-21	 very-wide flood 65°	76W	6850lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	211	220	-

The **photo** represents the family product range. You can see the correct image of each product (code) on the website.

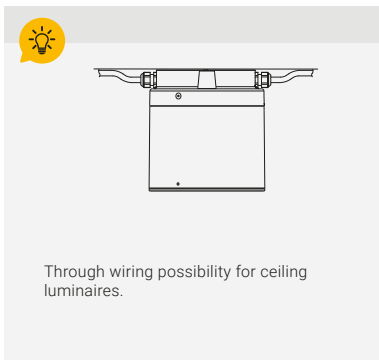

LED driver included.



Available on request:
emergency versions.

LUMINAIRE

- Die-cast aluminium body and trim (EN 47100).
- Double layer polyester powder paint resistant to corrosion and salt spray fog.
- Silicone rubber gaskets.
- AISI 316 stainless steel external screws.
- Reflector made of engineering plastic metalized in high-vacuum.
- Screen made of 4mm thermal-shock resistant tempered glass.
- High quality LED sources characterized according to IES TM-30, with high color consistency <3SDCM and long useful life >60000 hours at L80.
- It complies with standards EN 60598-1 and EN 60598-2-1.

INSTALLATION

- Ceiling installation.
- Remote control gear box for emergency version 3h.
- Tecnopolymer M20 cable gland.
- Available double cable gland version for through wiring on request.

Available versions with Casambi and other modern control systems, for more information see "Light controls" section.

STANDARD PRODUCT		AVAILABLE OPTIONS	
Wiring	ON/OFF (A)	DALI (B), ON/OFF-E (G)	
CCT	4000K (-840)	3000K (-830)	
Colour	<input checked="" type="radio"/> 21	<input type="radio"/> 11, <input checked="" type="radio"/> 12, <input type="radio"/> 16	



Photorealistic rendering.



Photorealistic rendering.