


Recessed floor fittings

KRION-IN

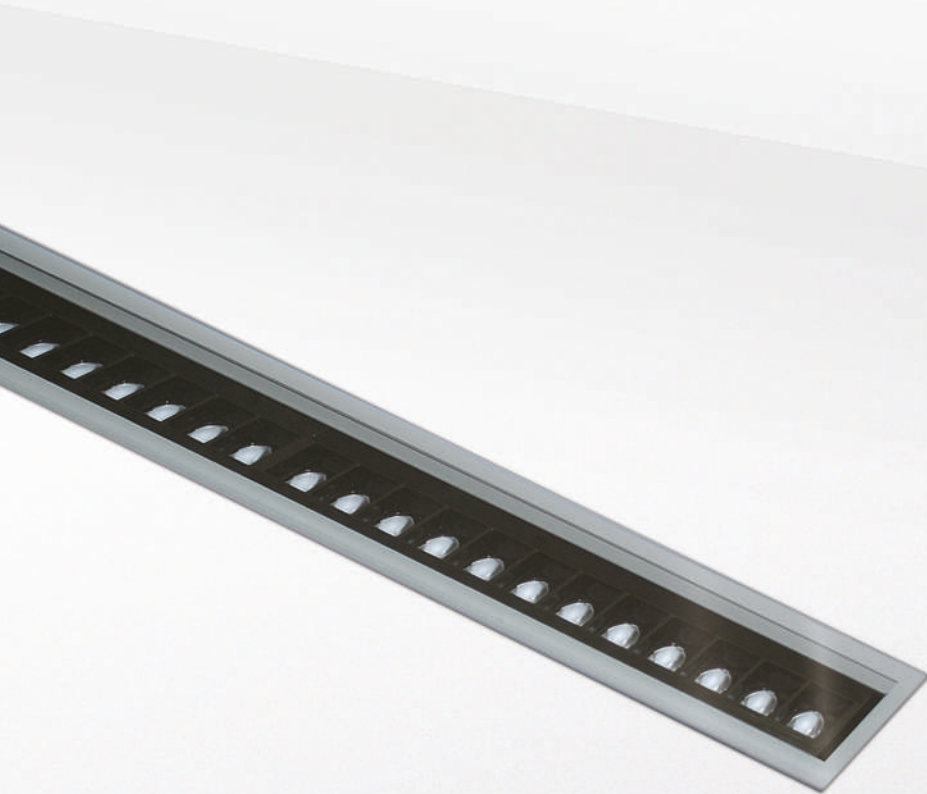

LUMINAIRE

- Extruded aluminium body.
- Die-cast aluminium end caps (EN 47100).
- Double layer polyester powder paint resistant to corrosion and salt spray fog.
- Silicone rubber gaskets.
- AISI 316 stainless steel external screws.
- PMMA lenses for LEDs.
- Screen made of 8mm thermal-shock resistant tempered glass.
- 1000Kg static load capacity.
- Can be walked over.
- High quality LED sources characterized according to IES TM-30, with high color consistency <3SDCM and long useful life >60000 hours at L80.

INSTALLATION

- Recessed installation.
- Double cable gland M20 for through wiring.
- Steel spring clips.
- Supplied with extruded aluminium recessed box.

These fittings are suitable for the modern control systems. For the various possibilities, please see section "Controlling the light".

End caps to be ordered separately.

STANDARD PRODUCT		AVAILABLE OPTIONS	
Wiring	ON/OFF (A)	DALI (B)	
CCT	4000K (-840), RGBW	3000K (-830)	
Colour	<input type="radio"/> 21	<input type="radio"/> 16	



📍 Žali, Shopping Center - Vilnius, Lithuania


Recessed floor fittings









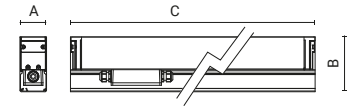









KRION-IN

PERFORMANCE +

Supplied with extruded aluminium recessed box. End caps to be ordered separately.


STANDARD COLOUR
 21

DIMENSIONS


Code	Optic	Luminaire		CRI	CCT	Class	Wiring	Power Supply	A mm	B mm	C mm
		Watt	Lumen								
0781000A-840-21	 medium 18°	20W	1900lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	70	142	346
0781001A-840-21	 medium 18°	39W	3800lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	70	142	639
0781002A-840-21	 medium 18°	81W	7600lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	70	142	1225
0781003A-840-21	 flood 28°	20W	1900lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	70	142	346
0781004A-840-21	 flood 28°	39W	3900lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	70	142	639
0781005A-840-21	 flood 28°	81W	7700lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	70	142	1225
0781006A-840-21	 wide flood 42°	20W	2050lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	70	142	346
0781007A-840-21	 wide flood 42°	39W	4050lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	70	142	639
0781008A-840-21	 wide flood 42°	81W	8050lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	70	142	1225
0781009A-840-21	 very-wide flood 72°	20W	1450lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	70	142	346
0781010A-840-21	 very-wide flood 72°	39W	2950lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	70	142	639
0781011A-840-21	 very-wide flood 72°	81W	5850lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	70	142	1225
0781012A-840-21	 elliptic 16°x35°	20W	2100lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	70	142	346
0781013A-840-21	 elliptic 16°x35°	39W	4150lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	70	142	639
0781014A-840-21	 elliptic 16°x35°	81W	8300lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	70	142	1225
0781015A-840-21	 wall washer lmax=18°	20W	2050lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	70	142	346
0781016A-840-21	 wall washer lmax=18°	39W	4050lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	70	142	639
0781017A-840-21	 wall washer lmax=18°	81W	8050lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	70	142	1225


 The **photo** represents the family product range. You can see the correct image of each product (code) on the website.

LED driver included.

KRION-IN

PERFORMANCE +


Supplied with extruded aluminium recessed box. End caps to be ordered separately.









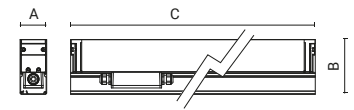



STANDARD COLOUR

● 21

DIMENSIONS



Code	Optic	Luminaire		CRI	CCT	Class	Wiring	Power Supply	A mm	B mm	C mm
		Watt	Lumen								
0781033F-21	 medium 18°	31W			RGBW	⊕	DMX	220-240V 50/60Hz	70	142	639
0781034F-21	 medium 18°	52W			RGBW	⊕	DMX	220-240V 50/60Hz	70	142	1225
0781035F-21	 flood 30°	31W			RGBW	⊕	DMX	220-240V 50/60Hz	70	142	639
0781036F-21	 flood 30°	52W			RGBW	⊕	DMX	220-240V 50/60Hz	70	142	1225
0781037F-21	 wide flood 48°	31W			RGBW	⊕	DMX	220-240V 50/60Hz	70	142	639
0781038F-21	 wide flood 48°	52W			RGBW	⊕	DMX	220-240V 50/60Hz	70	142	1225
0781039F-21	 very-wide flood 72°	31W			RGBW	⊕	DMX	220-240V 50/60Hz	70	142	639
0781040F-21	 very-wide flood 72°	52W			RGBW	⊕	DMX	220-240V 50/60Hz	70	142	1225
0781041F-21	 elliptical 16°x35°	31W			RGBW	⊕	DMX	220-240V 50/60Hz	70	142	639
0781042F-21	 elliptical 16°x35°	52W			RGBW	⊕	DMX	220-240V 50/60Hz	70	142	1225
0781043F-21	 wall washer Imax=18°	31W			RGBW	⊕	DMX	220-240V 50/60Hz	70	142	639
0781044F-21	 wall washer Imax=18°	52W			RGBW	⊕	DMX	220-240V 50/60Hz	70	142	1225

The **photo** represents the family product range. You can see the correct image of each product (code) on the website.


LED driver included.

Recessed floor fittings

KRION-IN

PERFORMANCE


Supplied with extruded aluminium recessed box. End caps to be ordered separately.









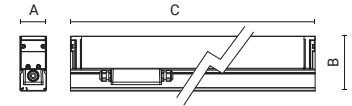








STANDARD COLOUR



DIMENSIONS



Code	Optic	Luminaire		CRI	CCT	Class	Wiring	Power Supply	A mm	B mm	C mm
		Watt	Lumen								
0781018A-840-21	 narrow 12°	15W	1500lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	70	142	346
0781019A-840-21	 narrow 12°	28W	3050lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	70	142	639
0781020A-840-21	 narrow 12°	56W	6200lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	70	142	1225
0781021A-840-21	 flood 26°	15W	1500lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	70	142	346
0781022A-840-21	 flood 26°	28W	3050lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	70	142	639
0781023A-840-21	 flood 26°	56W	6200lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	70	142	1225
0781024A-840-21	 wide flood 47°	15W	1350lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	70	142	346
0781025A-840-21	 wide flood 47°	28W	2700lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	70	142	639
0781026A-840-21	 wide flood 47°	56W	5500lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	70	142	1225
0781027A-840-21	 elliptic 10°x55°	15W	1400lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	70	142	346
0781028A-840-21	 elliptic 10°x55°	28W	2800lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	70	142	639
0781029A-840-21	 elliptic 10°x55°	56W	5700lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	70	142	1225
0781030A-840-21	 wall washer lmax=18°	15W	1450lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	70	142	346
0781031A-840-21	 wall washer lmax=18°	28W	2950lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	70	142	639
0781032A-840-21	 wall washer lmax=18°	56W	5950lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	70	142	1225


 The **photo** represents the family product range. You can see the correct image of each product (code) on the website.

LED driver included.

KRION-IN


ACCESSORIES

It is possible to purchase the recessed box separately, whenever it is necessary to start the installation in advance. The item can be ordered later on and it will be supplied complete with recessed box (to be removed if purchased separately in advance).




Code	Kg
1099342X-21 (L=342)	0,71
1099343X-21 (L=635)	1,30
1099344X-21 (L=1221)	2,50

Extruded aluminium installation-box.

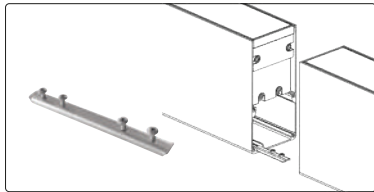

Code	Kg
1099241X	0,02

Straight joint.



Code	Kg
1099345X-21	0,03

End caps for installation-box.




Code	Kg
1099068X	0,02

Suction cup for fixture removal.



These fittings are suitable for the modern control systems. For the various possibilities, please see section "Controlling the light".

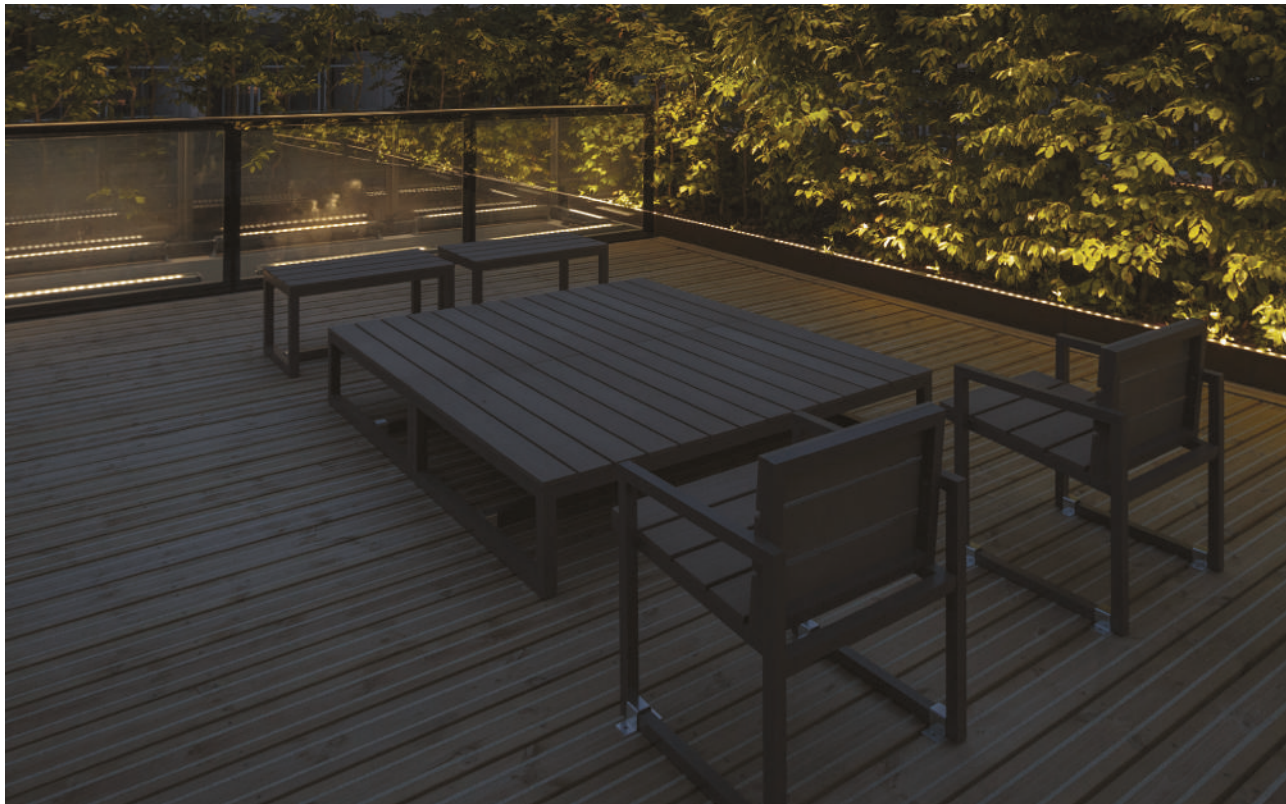

📍 Gabriel Square Garden - St Albans, London, United Kingdom