

Bollards

# QUADRIO180



### LUMINAIRE



- Die-cast aluminium body (EN 47100).
- Extruded aluminium pole.
- Double layer polyester powder paint resistant to corrosion and salt spray fog.
- Silicone rubber gaskets.
- AISI 316 stainless steel external screws.
- PMMA lenses for LEDs.
- Screen in opal PMMA stabilized against UV rays or in 5 mm thick tempered glass resistant to thermal shocks.
- High quality LED sources characterized according to IES TM-30, with high color consistency <3SDCM and long useful life >60000 hours at L80.
- It complies with standards EN 60598-1 and EN 60598-2-1.

### INSTALLATION

- Bollard installation.
- Die-cast aluminium base (EN 47100) for ground anchoring for raw/plugs.
- Supplied with power cable.

These fittings are suitable for the modern control systems. For the various possibilities, please see section "Controlling the light".

**Different accessories to be ordered separately.**

STANDARD PRODUCT		AVAILABLE OPTIONS	
Wiring	ON/OFF (A)	DALI (B)	
CCT	4000K (-840)	3000K (-830)	
Colour	 16	 21	



 Carlton Project - Lebanon

Bollards

# QUADRIO180

## PERFORMANCE





STANDARD COLOUR

● 16



DIMENSIONS



Code	Optic	Luminaire Watt	Lumen	CRI	CCT	Class	Wiring	Power Supply	A mm	B mm	C mm
<b>0868014A-840-16</b>	 radial	37W	2350lm	80	4000K	□	ON/OFF	220-240V 50/60Hz	180	686	1000

The **photo** represents the family product range. You can see the correct image of each product (code) on the website.

## COMFORT





STANDARD COLOUR

● 16



DIMENSIONS




Code	Optic	Luminaire Watt	Lumen	CRI	CCT	Class	Wiring	Power Supply	A mm	B mm	C mm
<b>0868000A-840-16</b>	 radial	27W	1650lm	80	4000K	□	ON/OFF	220-240V 50/60Hz	180	686	1000

The **photo** represents the family product range. You can see the correct image of each product (code) on the website.

LED driver included.


# QUADRIO<sup>180</sup>

## ACCESSORIES

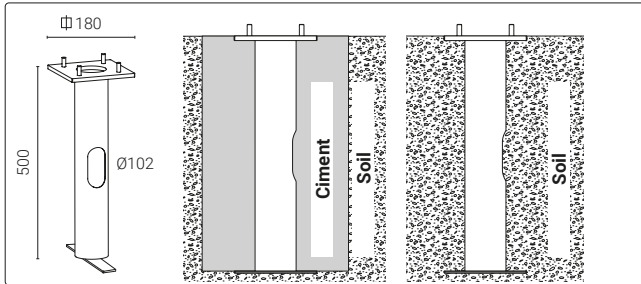


Code	Kg
<b>1099093X</b>	6,60

Zinc-coated steel pillar.



Code	Kg
<b>1099402X-16</b>	1,40

Galvanized and painted steel base plate with galvanized steel stud bolts.



Code	Kg
<b>1099259X</b>	0,03

Junction box IP68 - 4 ways - 2/3 poles



Code	Kg
<b>1099408X</b>	0,03

IP68 linear joint - 2 ways - 2 poles.



📍 BVH Engineers, Bloomfield - Connecticut, United States