

Bollards

SOUL180



LUMINAIRE



- Die-cast aluminium body (EN 47100).
- Extruded aluminium pole.
- Double layer polyester powder paint resistant to corrosion and salt spray fog.
- Silicone rubber gaskets.
- AISI 316 stainless steel external screws.
- PMMA lenses for LEDs.
- Screen made of 4mm thermal-shock resistant tempered glass.
- High quality LED sources characterized according to IES TM-30, with high color consistency <3SDCM and long useful life >60000 hours at L80.
- It complies with standards EN 60598-1 and EN 60598-2-1.

INSTALLATION

- Bollard installation.
- Die-cast aluminium base (EN 47100) for ground anchoring for rawlplugs.
- Supplied with power cable.

These fittings are suitable for the modern control systems. For the various possibilities, please see section "Controlling the light".

Different accessories to be ordered separately.

STANDARD PRODUCT		AVAILABLE OPTIONS	
Wiring	ON/OFF (A)	DALI (B)	
CCT	4000K (-840)	3000K (-830)	
Colour	 16	 21	



 Lyngarden Business Center - Trondheim, Norway

Bollards

SOUL180





STANDARD COLOUR

● 16




DIMENSIONS



Code	Optic	Luminaire		CRI	CCT	Class	Wiring	Power Supply	A mm	B mm	C mm
		Watt	Lumen								
0864003A-840-16	 radial	19W	1550lm	80	4000K	□	ON/OFF	220-240V 50/60Hz	182	1000	-


The **photo** represents the family product range. You can see the correct image of each product (code) on the website.

ACCESSORIES

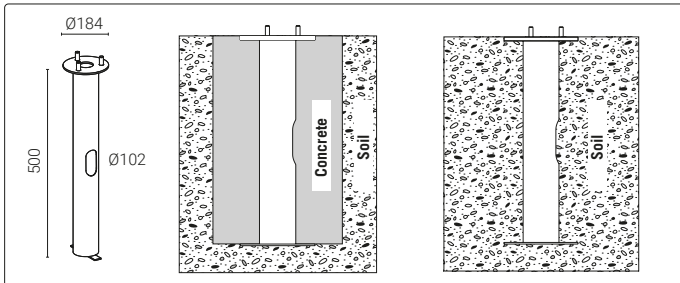

Code	Kg
1099092X	5,00

Zinc-coated steel pillar.




Code	Kg
1099398X-16	1,40

Galvanized and painted steel base plate with galvanized steel stud bolts.



Code	Kg
1099408X	0,03

IP68 linear joint -
2 ways - 2 poles.



Code	Kg
1099259X	0,05

Junction box IP68 -
4 ways - 2/3 poles

LED driver included.



📍 Lyngarden Business Center - Trondheim, Norway