

Recessed floor fittings

# T-RAIL

**NEW**



### LUMINAIRE

- Extruded aluminium body.
- 500Kg static load capacity.
- Can be walked over.
- Appliance built in compliance with EN 60598-1 and EN 60598-2-2 standards, complete with CE marking in compliance with EU directives.

### INSTALLATION

- Recessed installation in a special outer casing (included in the package) in AISI 316L stainless steel. It is possible to pre-order the outer boxes to prepare the system.
- Steel spring clips.
- Supplied with stainless steel recessed installation box.
- Supplied complete with power cord and plug.

These fittings are suitable for the modern control systems. For the various possibilities, please see section "Controlling the light".

End caps to be ordered separately.

To complete the installation, the single connection kit or the kit for looping multiple devices is required.

STANDARD PRODUCT		AVAILABLE OPTIONS
Wiring	REM-D (C)	
CCT	4000K (-840 = CRI 80 / CCT 4000)	3000K (-830 = CRI 80 / CCT 3000)
Colour	<input checked="" type="radio"/> 34 Natural Aluminium	



Photorealistic rendering.

Recessed floor fittings


# T-RAIL






STANDARD COLOUR

 34


DIMENSIONS




Code	Optic	Luminaire		CRI	CCT	Class	Wiring	Power Supply	A mm	B mm	C mm
		Watt	Lumen								
0782095C-940-34	 extra wide flood 110°	3.5W	175	90	4000K	⊕	REM-D	24Vdc	35	80	250
0782096C-940-34	 extra wide flood 110°	7W	350	90	4000K	⊕	REM-D	24Vdc	35	80	500
0782097C-940-34	 extra wide flood 110°	14W	700	90	4000K	⊕	REM-D	24Vdc	35	80	1000

 The **photo** represents the family product range. You can see the correct image of each product (code) on the website.


## ACCESSORIES




Code	Kg
<b>1099578X</b>	0,05

 Junction box IP68 -  
 3 ways - 2 poles mini.



Code	Kg
<b>1099618X</b>	0,03

 Female connector -  
 2 poles mini.



Code	Kg
<b>1099582X</b>	0,4

 Stainless steel recessed  
 installation box  
 L=250mm.


Code	Kg
<b>1099583X</b>	0,8


 Stainless steel recessed  
 installation box  
 L=500mm.


Code	Kg
<b>1099584X</b>	1,6

 Stainless steel recessed  
 installation box  
 L=1000mm.


Code	Kg
<b>1099580X</b>	0,01

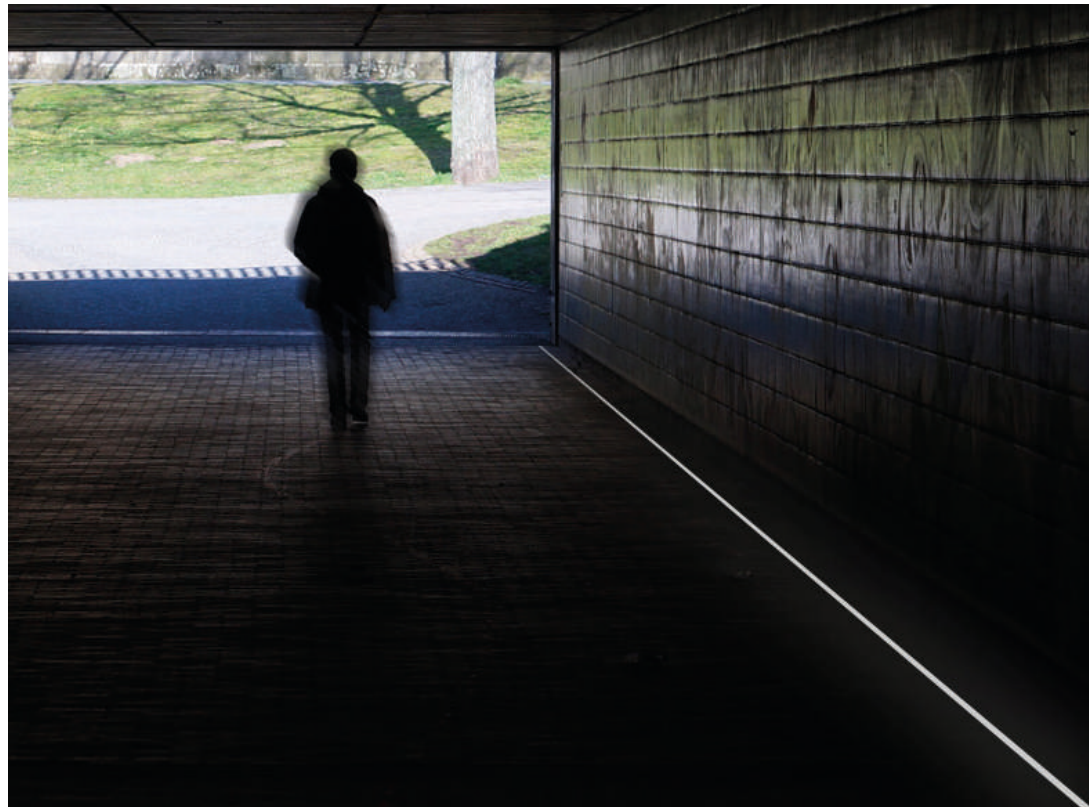
Linear joint.



Code	Kg
<b>1099579X</b>	0,01

End caps and puller.

# T-RAIL



Photorealistic rendering.