

Urban lighting

VICTORY



LUMINAIRE




- Die-cast aluminium body (EN 47100).
- Double layer polyester powder paint resistant to corrosion and salt spray fog.
- Silicone rubber gaskets.
- AISI 316 stainless steel external screws.
- Wiring on removable galvanized steel tray.
- Knife-switch for automatic power disconnection when opened.
- Driver protected against voltage surges up to 4kV.
- PMMA lenses for LEDs.
- Screen made of 5mm thermal-shock resistant tempered glass.
- High quality LED sources characterized according to IES TM-30, with high color consistency <3SDCM and long useful life >60000 hours at L80.
- It complies with standards EN 60598-1 and EN 60598-2-3.

INSTALLATION

- Post-top installation (Ø60mm reduction).
- Supplied with power cable ended (0.15m) by IP66 socket-plug connector with locking ring for cables of diameter 9-12mm.

Available versions with Casambi and other modern control systems, for more information see "Light controls" section.

Available wired with Zhaga Book 18 or NEMA ANSI C136.41 (5-pin) and waterproof cover.

STANDARD PRODUCT		AVAILABLE OPTIONS	
Wiring	ON/OFF (A)	DALI (B), BIP (E)	
CCT	4000K (-840)	3000K (-830)	
Colour	 21	 12,  16	



Photorealistic rendering.

Urban lighting


VICTORY


















STANDARD COLOUR

 21

DIMENSIONS



Code	Optic	Luminaire		CRI	CCT	Class	Wiring	Power Supply	A mm	B mm	C mm
		Watt	Lumen								
0880033A-840-21	 type II	40W	4700lm	80	4000K	□	ON/OFF	220-240V 50/60Hz	520	675	-
0880034A-840-21	 type II	75W	9150lm	80	4000K	□	ON/OFF	220-240V 50/60Hz	520	675	-
0880035A-840-21	 type II	113W	13650lm	80	4000K	□	ON/OFF	220-240V 50/60Hz	520	675	-
0880036A-840-21	 type III	40W	4800lm	80	4000K	□	ON/OFF	220-240V 50/60Hz	520	675	-
0880037A-840-21	 type III	75W	9450lm	80	4000K	□	ON/OFF	220-240V 50/60Hz	520	675	-
0880038A-840-21	 type III	113W	14200lm	80	4000K	□	ON/OFF	220-240V 50/60Hz	520	675	-
0880039A-840-21	 type IV	40W	4850lm	80	4000K	□	ON/OFF	220-240V 50/60Hz	520	675	-
0880040A-840-21	 type IV	75W	9600lm	80	4000K	□	ON/OFF	220-240V 50/60Hz	520	675	-
0880041A-840-21	 type IV	113W	14200lm	80	4000K	□	ON/OFF	220-240V 50/60Hz	520	675	-
0880042A-840-21	 type IV-L	40W	4850lm	80	4000K	□	ON/OFF	220-240V 50/60Hz	520	675	-
0880043A-840-21	 type IV-L	75W	9600lm	80	4000K	□	ON/OFF	220-240V 50/60Hz	520	675	-
0880044A-840-21	 type IV-L	113W	14100lm	80	4000K	□	ON/OFF	220-240V 50/60Hz	520	675	-
0880030A-840-21	 type VS	40W	5150lm	80	4000K	□	ON/OFF	220-240V 50/60Hz	520	675	-
0880031A-840-21	 type VS	75W	10050lm	80	4000K	□	ON/OFF	220-240V 50/60Hz	520	675	-
0880032A-840-21	 type VS	113W	14900lm	80	4000K	□	ON/OFF	220-240V 50/60Hz	520	675	-

 The **photo** represents the family product range. You can see the correct image of each product (code) on the website.



For post top mounting, check all available solutions on page 402.

LED driver included.

Available on request:
 versions with Future-Proof, see pag. 400.


VICTORY

ACCESSORIES

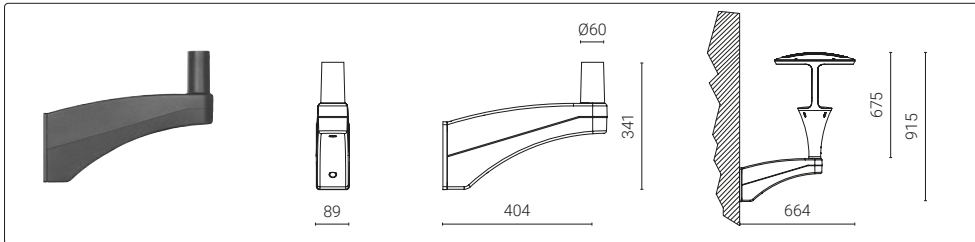


Code	Kg
1099098X-21	2,50

Wall bracket.

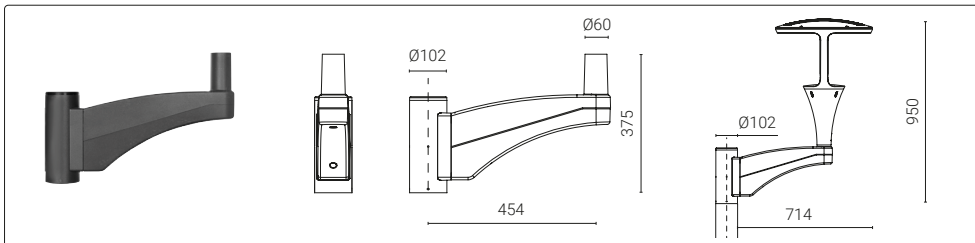

Code	Kg
1099097X-21	3,50

Post-top mounting for single fixture for Ø 102 mm.

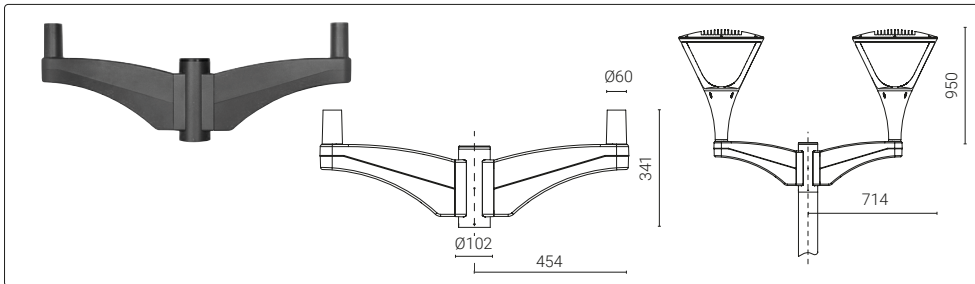

Code	Kg
1099096X-21	6,00

Post-top mounting for double fixture for Ø 102 mm.

