

Bollards

PIXOL110/150

NEW



LUMINAIRE

- Die-cast aluminium body (EN 47100).
- Support made of extruded aluminum or treated laminated wood.
- Double layer polyester powder paint resistant to corrosion and salt spray fog.
- Silicone rubber gaskets.
- AISI 316 stainless steel external screws.
- Lenses for LEDs made of optical technopolymer.
- Screen made of 5mm thermal-shock resistant tempered glass.
- High quality LED sources characterized according to IES TM-30, with high color consistency <3SDCM and long useful life >60000 hours at L80.
- It complies with standards EN 60598-1 and EN 60598-2-1.



INSTALLATION

- Bollard installation.
- Zinc-coated steel basement for ground anchoring for rawplugs.
- Supplied with power cable.

These fittings are suitable for the modern control systems. For the various possibilities, please see section "Controlling the light".

Different accessories to be ordered separately.

PIXOL is part of a series of coordinated products which includes: ceiling luminaires, facade fittings, bollards and outdoor floodlights.

STANDARD PRODUCT		AVAILABLE OPTIONS	
Wiring	ON/OFF (A)	DALI (B)	
CCT	4000K (-840)	3000K (-830)	
Colour	 16	 21	



Photorealistic rendering.

Bollards

PIXOL110


PIXOL110 - SIDE - SINGLE LIGHT FITTING




STANDARD COLOUR


 16


DIMENSIONS



Code	Optic	Luminaire		CRI	CCT	Class	Wiring	Power Supply	A mm	B mm	C mm
		Watt	Lumen								
0854000A-840-16	 one way	10W	590lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	110	210	700

 The **photo** represents the family product range. You can see the correct image of each product (code) on the website.


PIXOL110 - SIDE - DOUBLE LIGHT FITTING




STANDARD COLOUR


 16


DIMENSIONS



Code	Optic	Luminaire		CRI	CCT	Class	Wiring	Power Supply	A mm	B mm	C mm
		Watt	Lumen								
0854001A-840-16	 two way	20W	590lm 590lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	110	320	700

 The **photo** represents the family product range. You can see the correct image of each product (code) on the website.


PIXOL110 - SIDE - SINGLE LIGHT FITTING




STANDARD COLOUR


 16


DIMENSIONS



Code	Optic	Luminaire		CRI	CCT	Class	Wiring	Power Supply	A mm	B mm	C mm
		Watt	Lumen								
0854010A-840-16	 one way	10W	590lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	110	210	700

 The **photo** represents the family product range. You can see the correct image of each product (code) on the website.

LED driver included.

PIXOL110

PIXOL110 - SIDE - DOUBLE LIGHT FITTING





STANDARD COLOUR

● 16



DIMENSIONS



Code	Optic	Luminaire		CRI	CCT	Class	Wiring	Power Supply	A mm	B mm	C mm
		Watt	Lumen								
0854011A-840-16	 two way	20W	590lm 590lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	110	320	700

The **photo** represents the family product range. You can see the correct image of each product (code) on the website.

PIXOL110 - TOP - ONEWAY





STANDARD COLOUR

● 16



DIMENSIONS



Code	Optic	Luminaire		CRI	CCT	Class	Wiring	Power Supply	A mm	B mm	C mm
		Watt	Lumen								
0854020A-840-16	 one way	10W	310lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	110	110	730

The **photo** represents the family product range. You can see the correct image of each product (code) on the website.

PIXOL110 - TOP - TWOWAY





STANDARD COLOUR

● 16



DIMENSIONS



Code	Optic	Luminaire		CRI	CCT	Class	Wiring	Power Supply	A mm	B mm	C mm
		Watt	Lumen								
0854030A-840-16	 two way	10W	280lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	110	110	730

The **photo** represents the family product range. You can see the correct image of each product (code) on the website.

Bollards

PIXOL110


PIXOL110 - TOP - ONEWAY




STANDARD COLOUR

 16


DIMENSIONS



Code	Optic	Luminaire		CRI	CCT	Class	Wiring	Power Supply	A mm	B mm	C mm
		Watt	Lumen								
0854021A-840-16	 one way	10W	310lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	110	110	730

 The **photo** represents the family product range. You can see the correct image of each product (code) on the website.


PIXOL110 - TOP - TWOWAY




STANDARD COLOUR

 16


DIMENSIONS




Code	Optic	Luminaire		CRI	CCT	Class	Wiring	Power Supply	A mm	B mm	C mm
		Watt	Lumen								
0854031A-840-16	 two way	10W	280lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	110	110	730

 The **photo** represents the family product range. You can see the correct image of each product (code) on the website.

LED driver included.


PIXOL110

ACCESSORIES

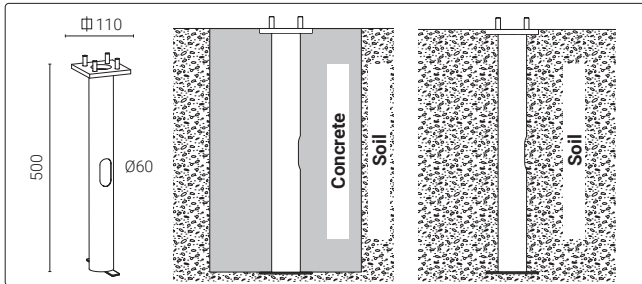

Code	Kg
1099091X	2,10

Zinc-coated steel pillar.



Code	Kg
1099401X-16	1,00

Galvanized and painted steel base plate with galvanized steel stud bolts.



Code	Kg
1099407X	0,03

Junction box IP68 - 4 ways - 4/5 poles.



Code	Kg
1099409X	0,03

IP68 linear joint - 2 ways - 3 poles.



Photorealistic rendering.

Bollards

PIXOL150


PIXOL150 - SIDE - SINGLE LIGHT FITTING




STANDARD COLOUR



DIMENSIONS



Code	Optic	Luminaire Watt	Lumen	CRI	CCT	Class	Wiring	Power Supply	A mm	B mm	C mm
0855000A-840-16	 one way	10W	620lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	150	200	900

 The **photo** represents the family product range. You can see the correct image of each product (code) on the website.


PIXOL150 - SIDE - DOUBLE LIGHT FITTING




STANDARD COLOUR



DIMENSIONS



Code	Optic	Luminaire Watt	Lumen	CRI	CCT	Class	Wiring	Power Supply	A mm	B mm	C mm
0855001A-840-16	 two way	20W	620lm 620lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	150	300	900

 The **photo** represents the family product range. You can see the correct image of each product (code) on the website.


PIXOL150 - SIDE - SINGLE LIGHT FITTING




STANDARD COLOUR



DIMENSIONS



Code	Optic	Luminaire Watt	Lumen	CRI	CCT	Class	Wiring	Power Supply	A mm	B mm	C mm
0855010A-840-16	 one way	10W	620lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	150	200	900

 The **photo** represents the family product range. You can see the correct image of each product (code) on the website.

LED driver included.

PIXOL150


PIXOL150 - SIDE - DOUBLE LIGHT FITTING




STANDARD COLOUR




DIMENSIONS



Code	Optic	Luminaire		CRI	CCT	Class	Wiring	Power Supply	A mm	B mm	C mm
		Watt	Lumen								
0855011A-840-16	 two way	20W	620lm 620lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	150	300	900


The **photo** represents the family product range. You can see the correct image of each product (code) on the website.

ACCESSORIES

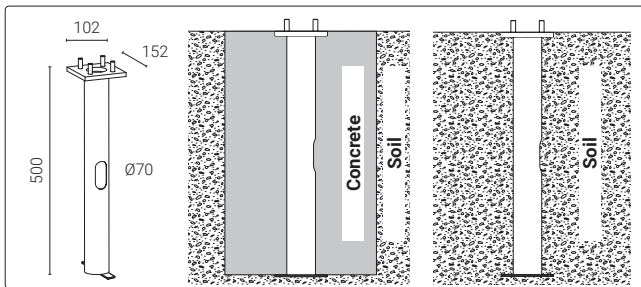

Code	Kg
1099563X	2,10

Zinc-coated steel pillar.



Code	Kg
1099562X-16	1,00

Galvanized and painted steel base plate with galvanized steel stud bolts.



Code	Kg
1099407X	0,03

Junction box IP68 - 4 ways - 4/5 poles.



Code	Kg
1099409X	0,03

IP68 linear joint - 2 ways - 3 poles.

Bollards

PIXOL150


PIXOL150 - TOP - ONEWAY




STANDARD COLOUR

 16


DIMENSIONS



Code	Optic	Luminaire		CRI	CCT	Class	Wiring	Power Supply	A mm	B mm	C mm
		Watt	Lumen								
0855020A-840-16	 one way	10W	340lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	150	150	900

 The **photo** represents the family product range. You can see the correct image of each product (code) on the website.


PIXOL150 - TOP - TWOWAY




STANDARD COLOUR

 16


DIMENSIONS



Code	Optic	Luminaire		CRI	CCT	Class	Wiring	Power Supply	A mm	B mm	C mm
		Watt	Lumen								
0855030A-840-16	 two way	20W	680lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	150	150	900

 The **photo** represents the family product range. You can see the correct image of each product (code) on the website.


PIXOL150 - TOP - ONEWAY




STANDARD COLOUR

 16


DIMENSIONS



Code	Optic	Luminaire		CRI	CCT	Class	Wiring	Power Supply	A mm	B mm	C mm
		Watt	Lumen								
0855021A-840-16	 one way	10W	340lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	150	150	900

 The **photo** represents the family product range. You can see the correct image of each product (code) on the website.

LED driver included.

PIXOL150

PIXOL150 - TOP - TWOWAY





STANDARD COLOUR

● 16




DIMENSIONS



Code	Optic	Luminaire		CRI	CCT	Class	Wiring	Power Supply	A mm	B mm	C mm
		Watt	Lumen								
0855031A-840-16	 two way	20W	680lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	150	150	900


The **photo** represents the family product range. You can see the correct image of each product (code) on the website.

ACCESSORIES

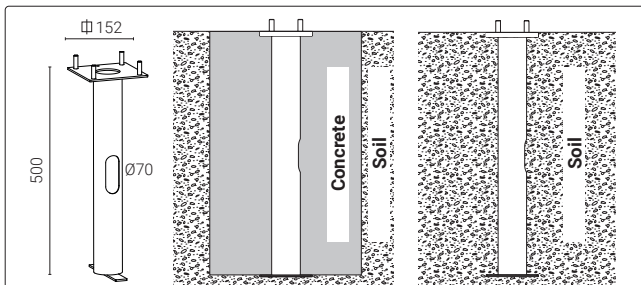

Code	Kg
1099565X	2,10

Zinc-coated steel pillar.



Code	Kg
1099564X-16	1,00

Galvanized and painted steel base plate with galvanized steel stud bolts.



Code	Kg
1099407X	0,03

Junction box IP68 - 4 ways - 4/5 poles.



Code	Kg
1099409X	0,03

IP68 linear joint - 2 ways - 3 poles.