

VIZOR

direct/indirect light





Arcluce Code **0246000A-830-11**
 Ex Code **C4600-11 CEI**
 Code EAN **8054378196799**



Technical information

Light source:	LED, 3000K, CRI>80
Indirect light source:	LED, 3000K, CRI>80
Luminaire efficacy:	82lm/W
Luminaire:	58W , 4750lm
LED life time:	> 60000h - L80 - B20 (Ta 25°C)
High colour consistency:	< 3 SDCM
Power supply:	220-240V 50/60Hz
Wiring:	ON/OFF
Optics:	wide flood 45°
Indirect Optic:	ultra wide flood 100
UGR:	<16
Color:	White - 11
Weight:	1.5 kg
Size:	A: 127mm B: 42mm C: 1200mm

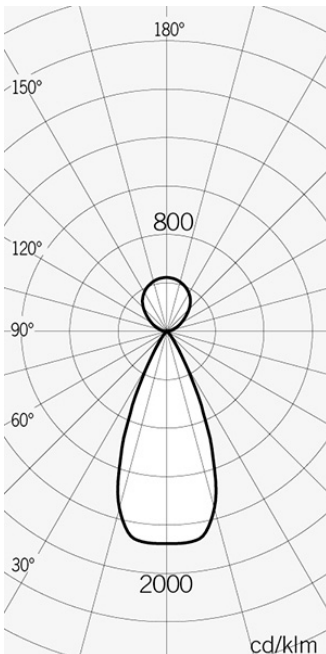

Appliance

- Extruded aluminium body.
- Die-cast aluminium caps.
- Polyester powder paint resistant to UV rays.
- PMMA lenses for LEDs.

Installation

- Suspended installation.
- Steel cable 1.5m for suspension.
- Cable cup with transparent power cable included.

Note

- These fittings are suitable for the modern control systems. For the various possibilities, please see section "Controlling the light".
- END CAPS AND SUSPENSION KIT INCLUDED.

Norm

- It complies with standards EN 60598-1 and EN 60598-2-2.

VIZOR

direct/indirect light



Arcluce Code **0246000A-830-11**
Ex Code **C4600-11 CEI**
Code EAN **8054378196799**



Specifications

Extruded aluminium body. Die-cast aluminium caps. Polyester powder paint resistant to UV rays. PMMA lenses for LEDs.

It complies with standards EN 60598-1 and EN 60598-2-2.

LED sources available in color temperatures 3000K, 3000K

High color consistency < 3 SDCM and LED life time > 60000h - L80 - B20 (Ta 25°C).

System effectiveness, minimum 82lm/W

Luminaire in insulation class I.

DRIVER INCLUDED.

Suspended installation. Steel cable 1.5m for suspension. Cable cup with transparent power cable included.

These fittings are suitable for the modern control systems. For the various possibilities, please see section "Controlling the light".

Brand ARCLUCE mod. VIZOR

VIZOR

direct/indirect light




Arcluce Code **0246001T-11**
 Ex Code **C4602-11 BLE**
 Code EAN **8054378196836**



Technical information

Light source:	LED, 24W
Indirect light source:	LED, 3000K, CRI>80
Luminaire efficacy:	84lm/W
Luminaire:	58W , 4850lm
LED life time:	> 60000h - L80 - B20 (Ta 25°C)
High colour consistency:	< 3 SDCM
Power supply:	220-240V 50/60Hz
Wiring:	BLE
Optics:	wide flood 45°
Indirect Optic:	ultra wide flood 100
UGR:	<16
Color:	White - 11
Weight:	1.5 kg
Size:	A: 127mm B: 42mm C: 1200mm



Appliance

- Extruded aluminium body.
- Die-cast aluminium caps.
- Polyester powder paint resistant to UV rays.
- PMMA lenses for LEDs.

Installation

- Suspended installation.
- Steel cable 1.5m for suspension.
- Cable cup with transparent power cable included.

Note

- These fittings are suitable for the modern control systems. For the various possibilities, please see section "Controlling the light".
- END CAPS AND SUSPENSION KIT INCLUDED.

Norm

- It complies with standards EN 60598-1 and EN 60598-2-2.

VIZOR

direct/indirect light



Arcluce Code **0246001T-11**
Ex Code **C4602-11 BLE**
Code EAN **8054378196836**



Specifications

Extruded aluminium body. Die-cast aluminium caps. Polyester powder paint resistant to UV rays. PMMA lenses for LEDs.

It complies with standards EN 60598-1 and EN 60598-2-2.

LED source in Tunable White version.

High color consistency < 3 SDCM and LED life time > 60000h - L80 - B20 (Ta 25°C).

System effectiveness, minimum 84lm/W

Luminaire in insulation class I.

DRIVER INCLUDED.

Suspended installation. Steel cable 1.5m for suspension. Cable cup with transparent power cable included.

These fittings are suitable for the modern control systems. For the various possibilities, please see section "Controlling the light".

Brand ARCLUCE mod. VIZOR